




1 Place a charged and coded OneKEY onto the Zips Alarm Unit. Press the button on the key to deactivate the Alarm Unit.




2 Place a DBG400 Magnet Key onto the lock icon on the Alarm Unit. Pull the sensor free from the Alarm Unit.

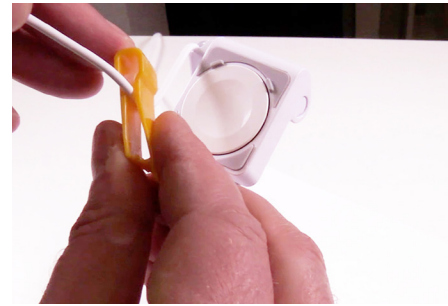

3 Remove the wearable from the cradle and pull enough of the cable from the stand to facilitate the removal. Place the cable clip (included with the WS2 Recoiler/W2000 stand) over the cable and snap it closed.



4 Use the TT8 bit with the multitool to remove the band clamp screw.

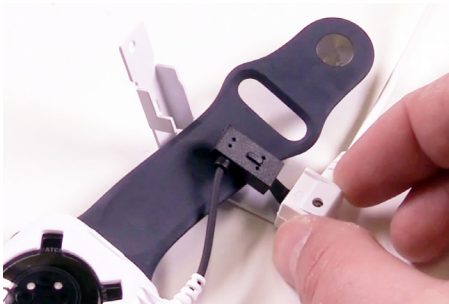

5 Open the band clamp.



6 Unplug the sensor from the WS2 Recoiler/W2000 cable.



7 Carefully lift one corner of the sensor from the wearable.




8 Lift the other corners away from the wearable and remove the sensor.




9a Remove any old adhesives from the wearable.




9b Remove any old adhesives from the corners of the sensor.

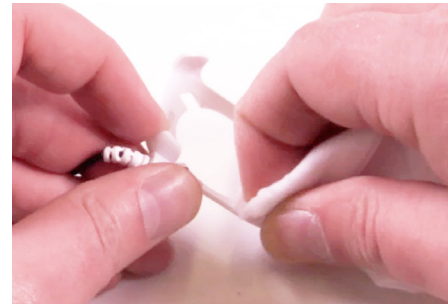

10 Use an alcohol wipe to clean any adhesive residue from the interior corners on the sensor. Allow it to dry completely.

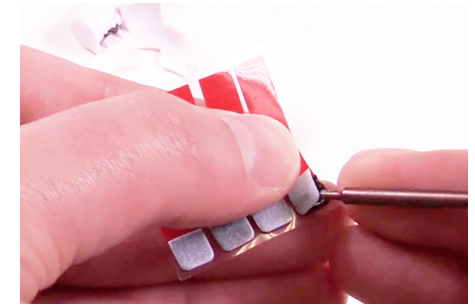

11 Carefully remove the small paper backing from one of the ADH2367 sensor replacement adhesives. **Note:** A small tool can be helpful when removing the backings.

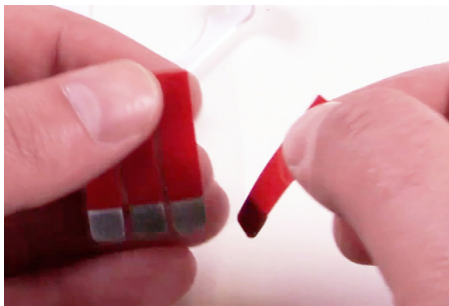

12 Remove the adhesive from the transparent backing.



13 Carefully place the adhesive, with the pull tab facing towards the center of the sensor, into the corner.



14 Press the adhesive against the corner for at least 10 seconds.



15 Repeat for the other 3 adhesives and corners. The sensor is now ready to be reinstalled.